



TS 71

Door Closer



Nextcraft Ltd.

Ironmongery, Curtain Rails, Blinds, Flooring,
Carpets, Automatic Sliding & Swing Doors,
Movable Partitions Renovations & much more

☎ 0722 493 359 / 0726 399 819

✉ info@nextcraftke.com

📍 Gate No. 95A
Limuru Road, Parklands.

🌐 www.nextcraftke.com

The inexpensive solution for standard doors – with quality assured

With the TS 71, DORMA has developed a door closer that rounds off its ClassicLine series perfectly. The ease and speed with which it can be fixed, the fact that its spring strength can be so easily adapted to the door

size – by simply turning round the hinge plate – and its competitive price should make it the ideal choice for your application.

Certified to ISO 9001

Benefits

For the trade

- Increased stocking flexibility thanks to use of the standard ClassicLine series arm.
- Complements the ClassicLine series as a competitive model for standard doors.

For the installer/fabricator

- Non-handed design.
- Easy and quick to fix.

For the architect/specifier

- Competitive and reliable.
- Compact construction combined with classic design.

For the user

- Constant closing action virtually unaffected by temperature fluctuations.
- Optimum closing speed adjustment with two regulating valves.
- Reliable closing with adjustable latching action.


Data and features		TS 71
Spring strength (adjustable by turning round the hinge plate)	Size	EN 3/4
Standard doors	≤ 1100 mm ¹⁾	●
External doors, outward opening		–
Fire doors		●
Non-handed		●
Arm type	Standard	●
	Slide channel	–
Closing speed adjustable at 2 separate valves	180° – 15°	●
	15° – 0°	●
Latching action adjustable (by arm)		●
Backcheck		–
Delayed action		–
Hold-open		○
Weight in kg		1.2
Dimensions in mm	Length	232
	Overall depth	45
	Height	68
Door closer tested and approved to EN 1154		●
CE mark for construction products		●

● Yes – No ○ Option

¹⁾With parallel-arm fixing, the closing force is approx. 20 Nm (for doors up to 950 mm)

Standard and optional functions



- 1 Closing speed adjustable in the range 180° – 15°.
- 2 Closing speed adjustable in the range 15° – 0°.
- 3 Latching action.
- 4 Hold-open range for model with hold-open arm (optional extra).

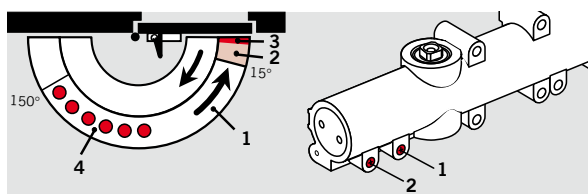

Schließkrafteinstellung


Door width	Setting
≤ 950	EN 3
≤ 1100	EN 4

With the TS 71, the spring strength (size setting) of the closer is adjusted to the door width concerned by merely turning round the hinge plate.

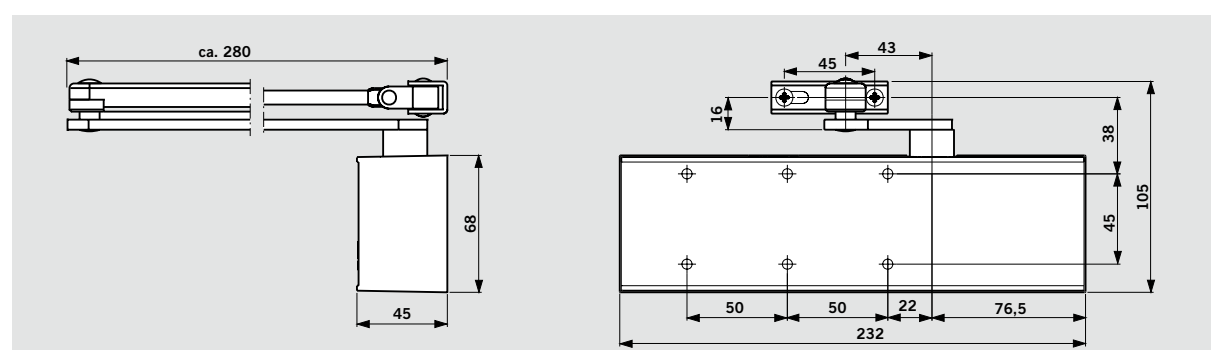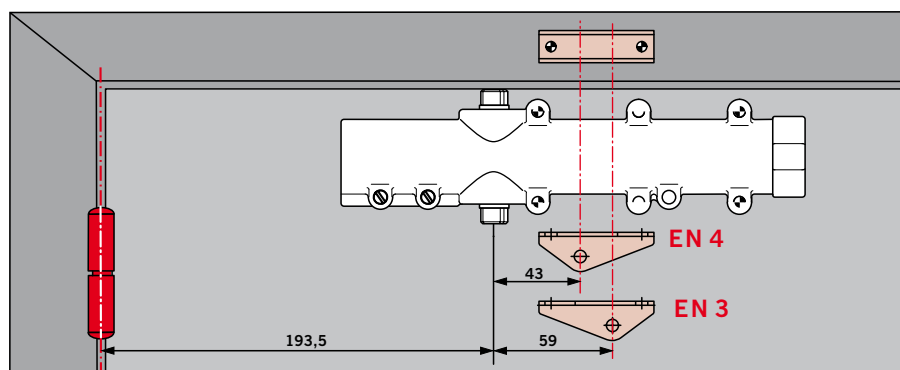


Door leaf fixing, pull side

(Example refers to left-hand [ISO 6] door; mirror image applies to right-hand [ISO 5] door)

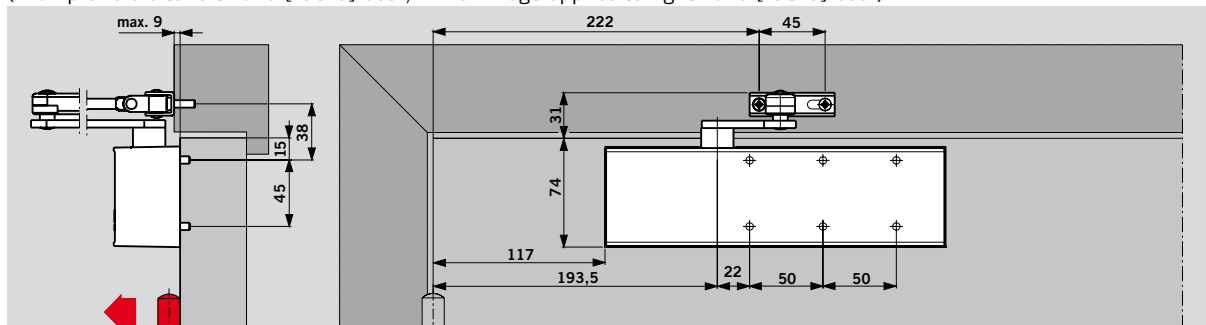


Transom fixing (overhead frame installation), push side

(Example refers to left-hand [ISO 6] door; mirror image applies to right-hand [ISO 5] door)

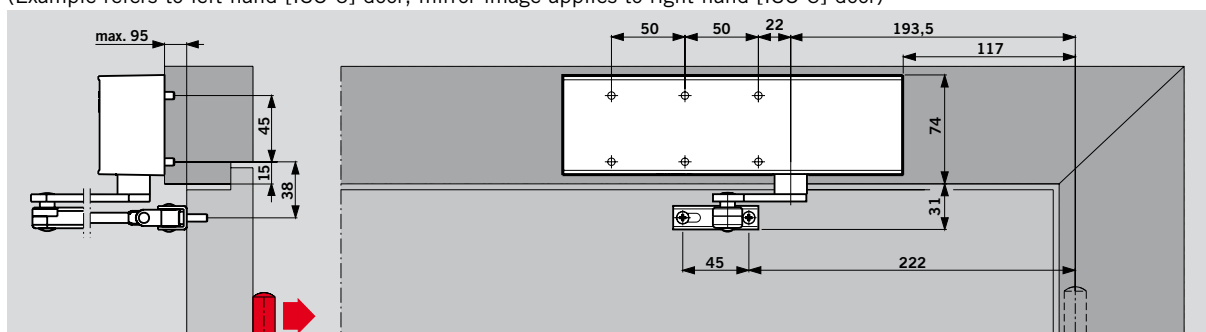

Parallel-arm fixing, push side

(Example refers to left-hand [ISO 6] door; mirror image applies to right-hand [ISO 5] door). Parallel-arm bracket (accessory) necessary




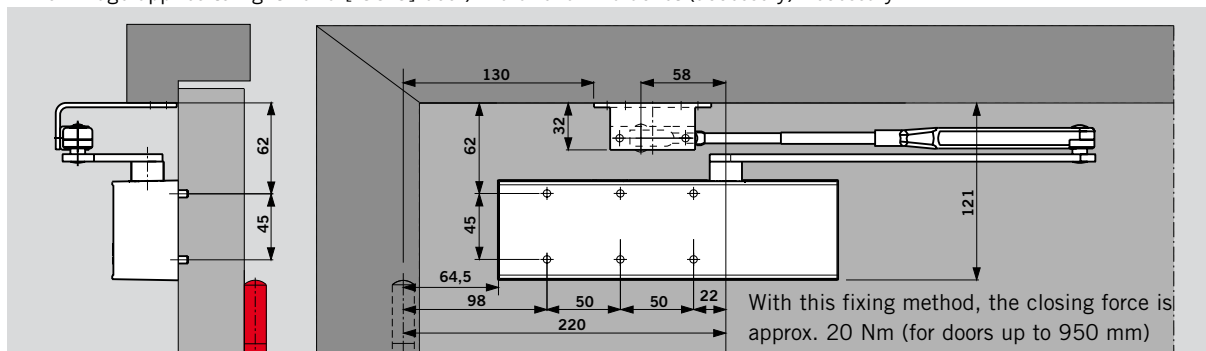


Standard equipment and accessories

Order No.:

■ = Closer separate
□ = Arm assembly separate
= Accessory

Colour **xx**
Silver 01
Dark brown 03
White (sim. to RAL 9010) 10
White (sim. to RAL 9016) 11
Special colour 09

Closer body TS 71	Standard arm	Hold-open arm	Mounting backplate	Parallel-arm bracket
				
220023xx	220025xx	220021xx	280066xx	
Size EN 3/4 222121xx			#	#

Specification text

Rack-and-pinion door closer with adjustable closing force, size EN 3 or 4, closing speed adjustable in two independent ranges, with adjustable latching action. Non-handed.

Tested and approved to EN 1154.

Model

- ☐ with standard arm
- ☐ with hold-open arm

Accessories

- ☐ Mounting backplate
- ☐ Fixing bracket for parallel-arm assembly

Colour

- ☐ Silver ☐ Dark brown
- ☐ White (sim. to RAL 9010)
- ☐ White (sim. to RAL 9016)
- ☐ Special colour _____ (sim. to RAL _____)

Make DORMA TS 71



Door Control



Automatic




**Glass Fittings
and Accessories**



**Security/Time
and Access (STA)**



Movable Walls



0722 493 359 / 0726 399 819

info@nextcraftke.com

Gate No. 95A
Limuru Road, Parklands.

www.nextcraftke.com