



2102

hand-drawn

for light and medium-weight curtains



Elegant track with an eye for detail



Nextcraft Ltd.

Ironmongery, Curtain Rails, Blinds, Flooring,
Carpets, Automatic Sliding & Swing Doors,
Movable Partitions Renovations & much more

☎ 0722 493 359 / 0726 399 819

✉ info@nextcraftke.com

📍 Gate No. 95A
Limuru Road, Parklands.

🌐 www.nextcraftke.com



2102

hand-drawn compact & elegant

The 2102 is one of Goelst's most popular small channel tracks. This compact track can be mounted in various ways on a wall or ceiling, and is used in widely ranging situations, such as bay windows in houses, office buildings and care institutions.

- The ideal track for sheers, lightweight or medium-heavy curtains.
- Easy to bend and exceptional quality.
- Can be forward or reverse bent in different radii.
- Smart mounting brackets with cover flaps that conceal screws from sight.
- Compatible with the Goelst Flow System for regularly pleated curtains.
- Silent and smooth running, also round bends.



Standard colours




High quality, wear-resistant coating, highly colourfast, UV-resistant.
Other RAL colours & special coatings on request.

Features

Material:	aluminium
Colour:	white, natural anodised, black
Dimensions:	15 x 10 mm
Weight profile:	166 gr/m ¹
Mounting:	wall or ceiling

Profile specifications

Aluminium profile:



Colours with RAL code and lengths (m):

	RAL	4	5	6	7
white	9010	•	•	•	•
naturel		•	•	•	
black	9005			•	

Mounting surface:

- wood
- masonry/concrete

Bracket type:

- ceiling bracket
- wall bracket
- spacer bracket

Bending:

bending radius	bending tool
R 8 cm	1013
R 10 cm	1012/1015
R > 80 cm	1018

R 8 cm

R > 80 cm


Flow

The Goelst Flow System keeps pleats in curtains consistent. It can be used with small and wide channel tracks and, because of the broad assortment of components, it can be integrated in hand-drawn, cord-pulled and electrically operated systems.


The Flow System can also be used with curved curtain tracks. For further information, see the Flow product data sheet.




Mounting

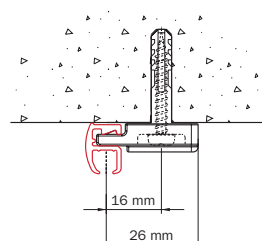


Ceiling mounting with bracket 2150.

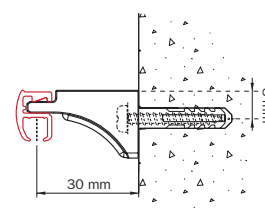

Wall mounting with bracket 2151

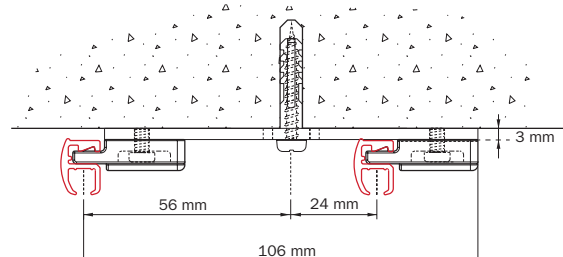


For excellent parallel fitting: mounting with double fixing bracket 2216 and ceiling brackets 2150.

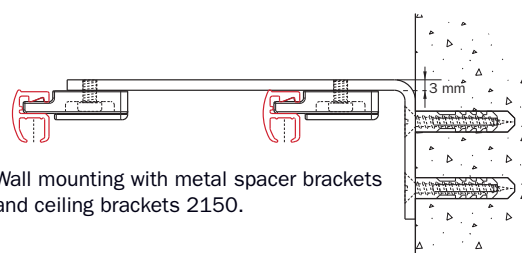

Wall mounting with metal spacer brackets and ceiling brackets 2150.

Mounting guideline





The distance between the brackets can vary depending on the following factors: the mounting surface (wood, concrete or plaster), the weight of the curtains and the curtain fabric production method, the specific application and the system usage intensity. General advice: with the curtains open, place additional brackets where the pleats bunch together. Also place additional brackets before and after bends.



Application example


2152 connecting bridge

Metal connector for joining profile 2102.

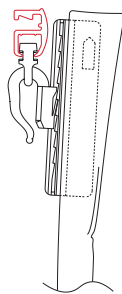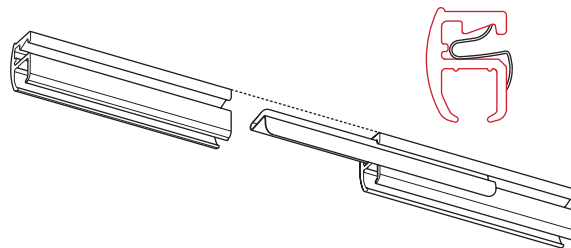


2100

Suitable for a heading with glider 2010 and sew-in hook 2024.



2010 glider

Width: 10 mm
Maximum load: 1 kg
Colours: white, grey, black

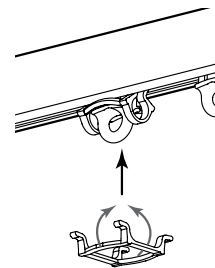

Glider stop 2004

This glider stop is used to keep pleated curtains symmetrically open or closed. It can also be fitted after mounting the track and hanging the curtain. Multiple stops are evenly spaced along the track.

Specification guide

Material


- Aluminium EN AW-6060-T66.
- Anodised in accordance with the Qualanod standard.
- Powder coated in accordance with the Qualicoat standard.

Standard parts


Curtain transport



Mounting




Accessories


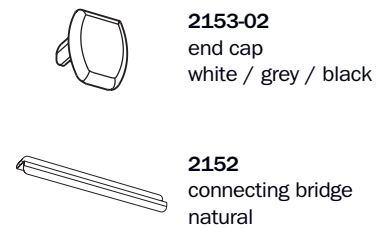


Optional parts


Curtain transport

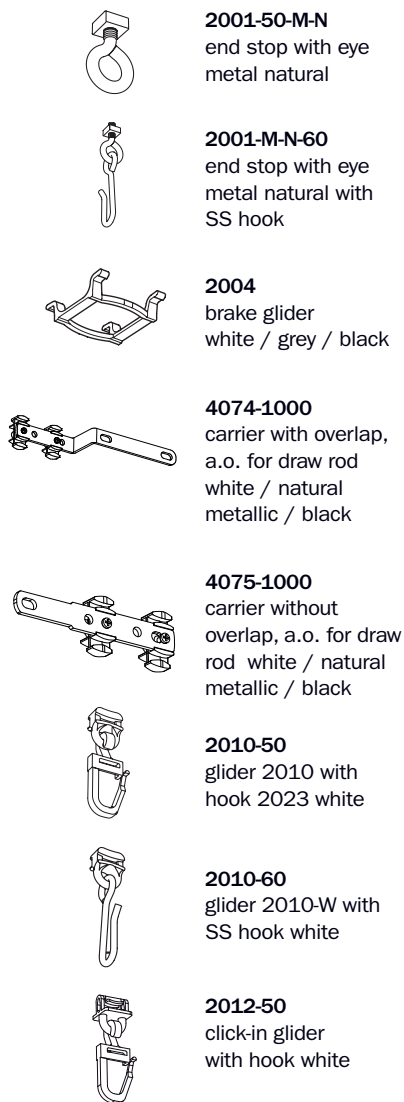

Mounting

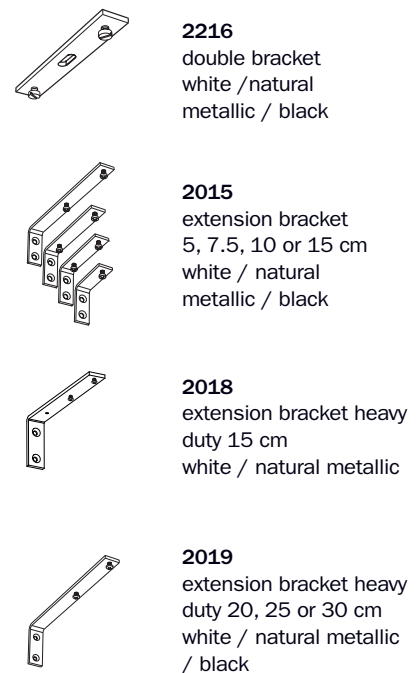

Accessories





0722 493 359 / 0726 399 819

info@nextcraftke.com

Gate No. 95A
Limuru Road, Parklands.

www.nextcraftke.com